

Frameless Glass Hinge Doors

STC RANGE	34-39 dependent on glass
GLASS THICKNESS	3/8" or 1/2"
CLOSERS	Hold open or non-hold open closers available
HARDWARE	Ladder pulls, cylindrical or mortise lever sets, both locking & non-locking
DOOR FRAME	Integrated stop with acoustic seals
LEAD TIME	4-6 weeks
PROCESS	Engineered to order | Direct turn-key for seamless delivery and install
MANUFACTURED IN	Strongsville, OH

MORE DOORS

STANDARD HARDWARE.

Frameless Glass Hinge Doors

CUSTOM HARDWARE SOLUTIONS

INFINIUM has a wide array of beautiful door options that work with any of our wall systems. In addition to our standard offerings, we work with all major hardware manufacturers to provide you with an unlimited selection to fit your project needs. No matter what your requirements may be, our in-house team of engineers and project managers will work together to provide a custom hardware solution that's right for you.

STANDARD HARDWARE

BILOBA BL 8060 - INFINIUM PROPRIETARY HINGE

+ 3 1/2" wide x 3 7/16" tall



LEVER SETS

LK500 PASSAGE SET

+ Suitable for 8mm & 10mm (5/16" & 3/8") glass
  **For 12mm (1/2") glass door use, please specify upon ordering.*



LK-500S LOCK SET WITH "C" KEYWAY + CORE

+ Suitable for 8mm & 10mm (5/16" & 3/8") glass
  **For 12mm (1/2") glass door use, please specify upon ordering.*
+ Interior with thumb-turn and exterior with cylinder & security rose cover (unlocked by key from outside, or the thumb-turn inside to open the door).



Standard hardware information and details in this document are subject to change based on the project scope of work.

STANDARD HARDWARE.

Frameless Glass Hinge Doors

LADDER PULLS

DPA 4000 NON-LOCKING LADDER PULL

+ With advance notification, the capability to swap non-locking with locking pulls can be achieved Day 2 utilizing non-locking pulls that accommodate the same size insert requirements for pull mounts on glass.



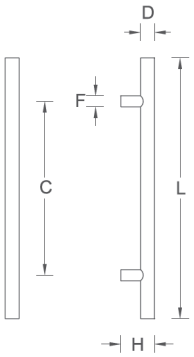

D 32 mm
C Per Project Spec
H 70 mm
L Per Project Spec
F 25 mm

LDP LOCKING LADDER PULL

+ Heavy duty stainless steel construction
+ Key-operated from exterior; turnknob from interior
+ Accomodates door thinkness 8-19mm range
+ 16mm steel deadbolt with 32mm throw
+ Floor locking standard, head and dual locking available
+ Bolt location: 64mm from face of door to centerline of bolt
+ Available in SFIC & LFIC, side-bitted, or standard SC cylinder options
+ With advance notification, the capability to swap non-locking with locking pulls can be achieved Day 2 utilizing non-locking pulls that accommodate the same size insert requirements for pull mounts on glass.



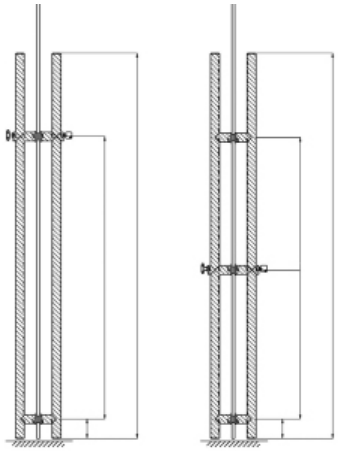

ITEM	B	A
LDP1 — 1200	925mm	1200mm
LDP1 — 1500	1250mm	1500mm

ITEM	C	B	A
LDP1 — 1800	925mm	725mm	1800mm
LDP1 — 2000	925mm	925mm	2000mm
LDP1 — 2400	1175mm	1075mm	2400mm

LDP1A13 (ADA)



Standard hardware information and details in this document are subject to change based on the project scope of work.

STANDARD HARDWARE.

Frameless Glass Hinge Doors

DROP SEALS

FRAMELESS GLASS DROP SEALS



+ Sound absorption level up to 48 dB with optimal sealing
+ No scraping/tearing on the floor, thanks to parallel drop
+ Automatic compensation for uneven flooring
+ High-quality silicone lip, lateral protrusion adjustable
+ Easy drop height adjustment

ELECTRIC | HIGH SECURITY HARDWARE

ELECTRIC STRIKE



+ Equipped with a mortise or cylindrical lockset with up to 3/4" latchbolt projection without deadbolt.
+ Electrical actuation unlocks the keeper, releasing the latchbolt so the door may be opened without operating the latch itself.

SURFACE-MOUNTED MAGLOCKS



+ 500 lbs. holding force
+ 750 lbs. holding force

ROOM SCHEDULERS | CARD READERS

+ Upon specification, INFINIUM will help coordinate the installation of power for room schedulers and/or card readers provided by others, and integrate these features into our wall systems.

Standard hardware information and details in this document are subject to change based on the project scope of work.



Frameless Glass Sliding Doors

STC RANGE	34-39 dependent on glass
GLASS THICKNESS	3/8” or 1/2”
SOUNDPROOFING	Standard acoustic seals and gaskets included
CLOSERS	Standard soft close/open
HARDWARE	Ladder pulls, both locking & non-locking
LEAD TIME	4-6 weeks
PROCESS	Engineered to order | Direct turn-key for seamless delivery and install
MANUFACTURED IN	Strongsville, OH

MORE DOORS

STANDARD HARDWARE.

Frameless Glass Sliding Doors

CUSTOM HARDWARE SOLUTIONS

INFINIUM has a wide array of beautiful door options that work with any of our wall systems. In addition to our standard offerings, we work with all major hardware manufacturers to provide you with an unlimited selection to fit your project needs. No matter what your requirements may be, our in-house team of engineers and project managers will work together to provide a custom hardware solution that's right for you.

STANDARD HARDWARE

INFINIUM PROPRIETARY SLIDING HARDWARE

+ Standard soft-open, soft-close
+ Fitting set for single 132 lb — 220 lb top hung sliding glass door with upper track
+ Wall mounting and ceiling installation

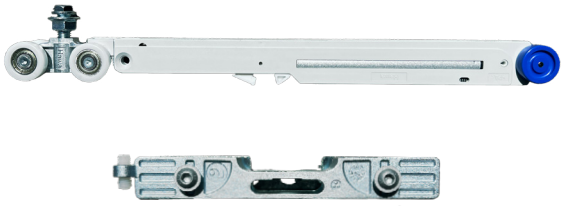

DROP SEALS

FRAMELESS GLASS DROP SEALS

+ Sound absorption level up to 48 dB with optimal sealing
+ No scraping/tearing on the floor, thanks to parallel drop
+ Automatic compensation for uneven flooring
+ High-quality silicone lip, lateral protrusion adjustable
+ Easy drop height adjustment



Standard hardware information and details in this document are subject to change based on the project scope of work.

STANDARD HARDWARE.

Frameless Glass Sliding Doors

LADDER PULLS

DPA 4000 NON-LOCKING LADDER PULL

+ With advance notification, the capability to swap non-locking with locking pulls can be achieved Day 2 utilizing non-locking pulls that accommodate the same size insert requirements for pull mounts on glass.



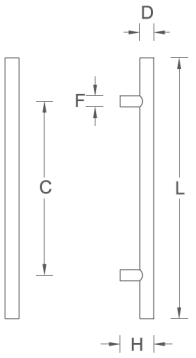

D 32 mm
C Per Project Spec
H 70 mm
L Per Project Spec
F 25 mm

LDP LOCKING LADDER PULL

+ Heavy duty stainless steel construction
+ Key-operated from exterior; turnknob from interior
+ Accomodates door thinkness 8-19mm range
+ 16mm steel deadbolt with 32mm throw
+ Floor locking standard, head and dual locking available
+ Bolt location: 64mm from face of door to centerline of bolt
+ Available in SFIC & LFIC, side-bitted, or standard SC cylinder options
+ With advance notification, the capability to swap non-locking with locking pulls can be achieved Day 2 utilizing non-locking pulls that accommodate the same size insert requirements for pull mounts on glass.

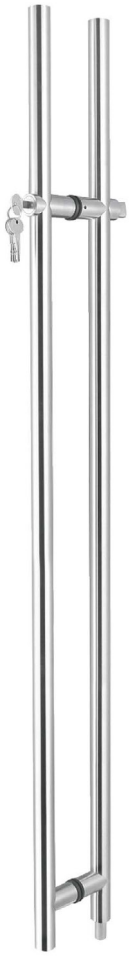

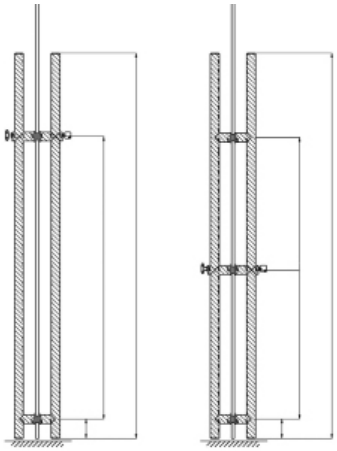

ITEM	B	A
LDP1 — 1200	925mm	1200mm
LDP1 — 1500	1250mm	1500mm

ITEM	C	B	A
LDP1 — 1800	925mm	725mm	1800mm
LDP1 — 2000	925mm	925mm	2000mm
LDP1 — 2400	1175mm	1075mm	2400mm

LDP1A13 (ADA)



Standard hardware information and details in this document are subject to change based on the project scope of work.

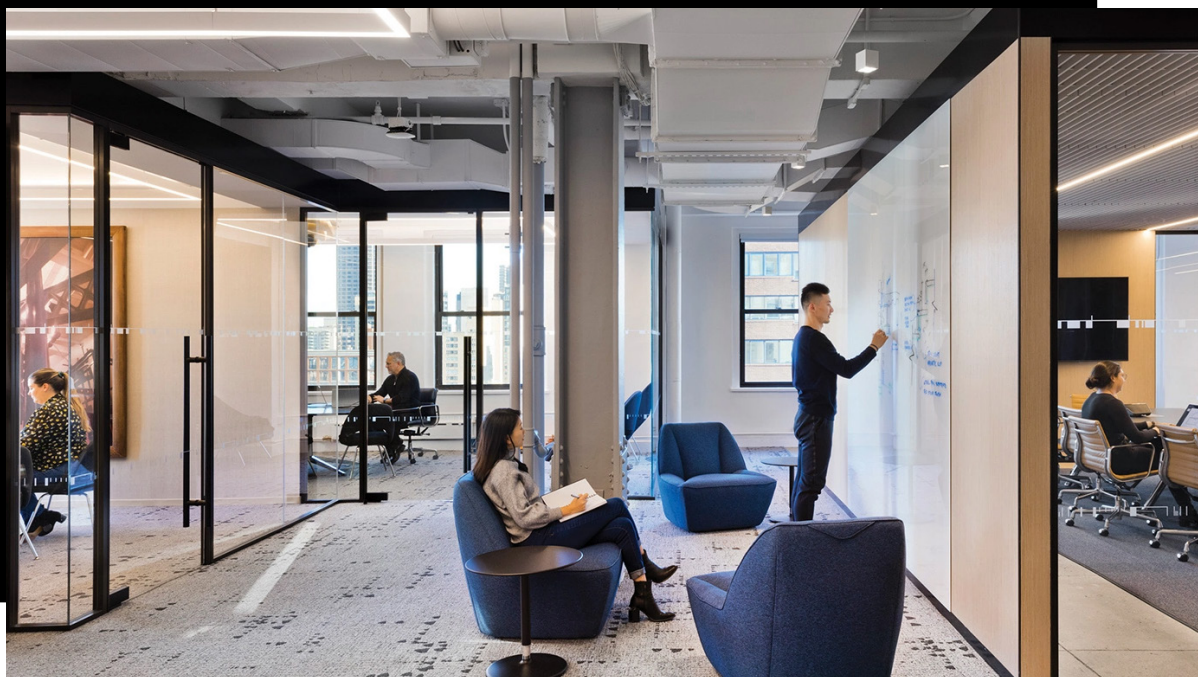

Frameless Glass Pivot Doors

STC RANGE	34-39 dependent on glass
GLASS THICKNESS	3/8" or 1/2"
CLOSERS	Hold open or non-hold open closers available
HARDWARE	Ladder pulls, cylindrical or mortise lever sets, both locking & non-locking
LEAD TIME	4-6 weeks
PROCESS	Engineered to order | Direct turn-key for seamless delivery and install
MANUFACTURED IN	Strongsville, OH

MORE DOORS

STANDARD HARDWARE.

Frameless Glass Pivot Doors

CUSTOM HARDWARE SOLUTIONS

INFINIUM has a wide array of beautiful door options that work with any of our wall systems. In addition to our standard offerings, we work with all major hardware manufacturers to provide you with an unlimited selection to fit your project needs. No matter what your requirements may be, our in-house team of engineers and project managers will work together to provide a custom hardware solution that's right for you.

STANDARD HARDWARE

INFINIUM PROPRIETARY PIVOT HARDWARE

+ Top patch block with adjustable pivot pin for glass door to the frame
+ Adjustable hydraulic door closer





LEVER SETS

LK500 PASSAGE SET

+ Suitable for 8mm & 10mm (5/16" & 3/8") glass
  **For 12mm (1/2") glass door use, please specify upon ordering.*



LK-500S LOCK SET WITH "C" KEYWAY + CORE

+ Suitable for 8mm & 10mm (5/16" & 3/8") glass.
  **For 12mm (1/2") glass door use, please specify upon ordering.*
+ Interior with thumb-turn and exterior with cylinder & security rose cover (unlocked by key from outside, or the thumb-turn inside to open the door).



Standard hardware information and details in this document are subject to change based on the project scope of work.

STANDARD HARDWARE.

Frameless Glass Pivot Doors

LADDER PULLS

DPA 4000 NON-LOCKING LADDER PULL

+ With advance notification, the capability to swap non-locking with locking pulls can be achieved Day 2 utilizing non-locking pulls that accommodate the same size insert requirements for pull mounts on glass.



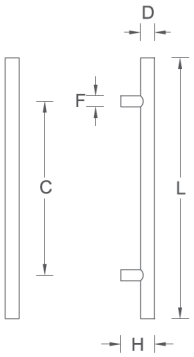

D 32 mm
C Per Project Spec
H 70 mm
L Per Project Spec
F 25 mm

LDP LOCKING LADDER PULL

+ Heavy duty stainless steel construction
+ Key-operated from exterior; turnknob from interior
+ Accomodates door thinkness 8-19mm range
+ 16mm steel deadbolt with 32mm throw
+ Floor locking standard, head and dual locking available
+ Bolt location: 64mm from face of door to centerline of bolt
+ Available in SFIC & LFIC, side-bitted, or standard SC cylinder options
+ With advance notification, the capability to swap non-locking with locking pulls can be achieved Day 2 utilizing non-locking pulls that accommodate the same size insert requirements for pull mounts on glass.



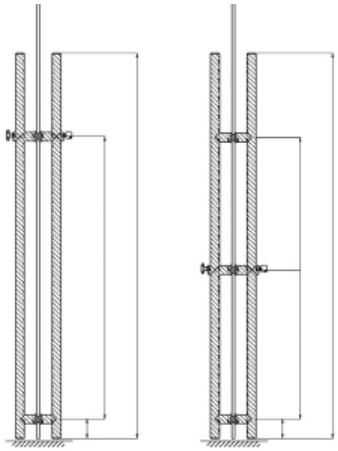

ITEM	B	A
LDP1 — 1200	925mm	1200mm
LDP1 — 1500	1250mm	1500mm

ITEM	C	B	A
LDP1 — 1800	925mm	725mm	1800mm
LDP1 — 2000	925mm	925mm	2000mm
LDP1 — 2400	1175mm	1075mm	2400mm

LDP1A13 (ADA)



Standard hardware information and details in this document are subject to change based on the project scope of work.

STANDARD HARDWARE.

Frameless Glass Pivot Doors

ELECTRIC | HIGH SECURITY HARDWARE

ELECTRIC STRIKE



+ Equipped with a mortise or cylindrical lockset with up to 3/4" latchbolt projection without deadbolt.
+ Electrical actuation unlocks the keeper, releasing the latchbolt so the door may be opened without operating the latch itself.

SURFACE-MOUNTED MAGLOCKS



+ 500 lbs. holding force
+ 750 lbs. holding force
+ Top & bottom rail available upon design intent

CONCEALED OVERHEAD SOLENOID BOLT LOCK



+ Dual monitoring lock
+ Selectable locking time
+ Top rail is required
+ Fully automatic 12/24V DC selection
+ CE listed

ROOM SCHEDULERS | CARD READERS

+ Upon specification, INFINIUM will help coordinate the installation of power for room schedulers and/or card readers provided by others, and integrate these features into our wall systems.

Standard hardware information and details in this document are subject to change based on the project scope of work.